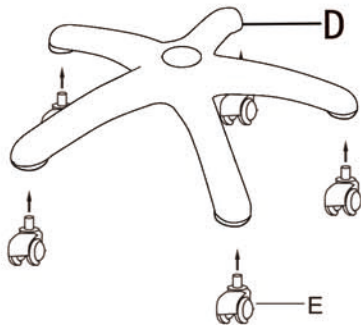
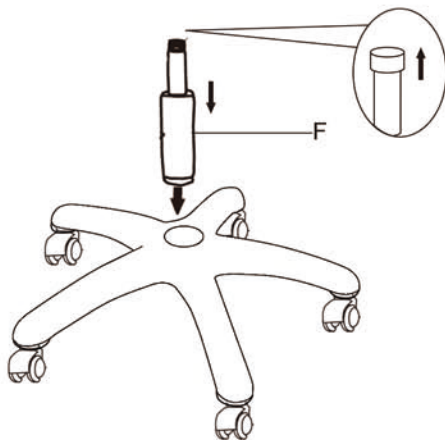
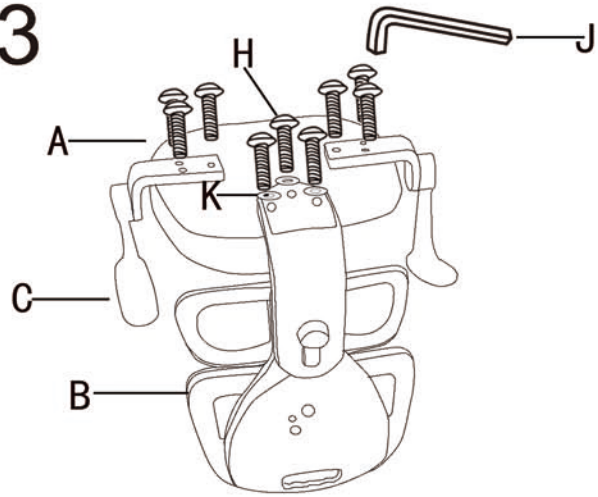
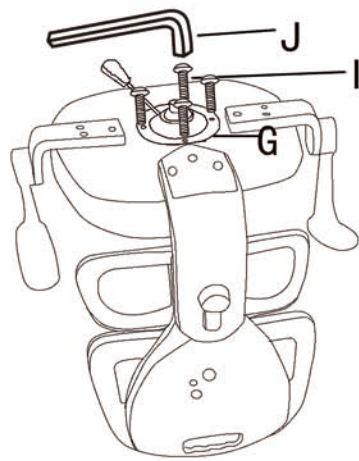
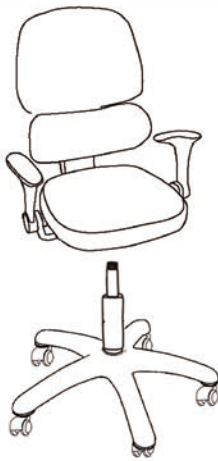


MODEL : FB28-FX

1  Diagram 1 shows a five-pointed star-shaped base plate (D) with four casters (E) being attached to its arms using screws.	2  Diagram 2 shows the central post (F) being inserted into the center of the base plate (D). A callout shows the post with an arrow pointing up and the text "Move the protection cap away".	3  Diagram 3 shows the backrest assembly (B) being attached to the base plate (D) using screws (A) and a screwdriver (J). The backrest assembly (B) is shown with a callout indicating the location of the screws (A) and the screwdriver (J). The backrest assembly (B) is also shown with a callout indicating the location of the screws (A) and the screwdriver (J).								
4  Diagram 4 shows the seat assembly (C) being attached to the backrest assembly (B) using screws (I) and a screwdriver (J).	5  Diagram 5 shows the assembled chair with the backrest and seat attached to the base.	6  Diagram 6 shows the assembled chair with the backrest and seat attached to the base.								
A*1 	B*1 	C*2 	D*1 	E*5 	F*1 	G*1 	H*9  6*30	I*4  6*20	J*1 	K*3 