


INSTALLATION INSTRUCTIONS - WALL-MOUNTED BATH MIXER BESCO

MODELS:


ILLUSION / BW-IS-CH, BW-IS-CZ, BW-IS-ZL



Before installing the mixer, carefully read these instructions and all warnings and operating recommendations contained in the enclosed warranty card. Incorrect installation may damage the mixer and void the product warranty!

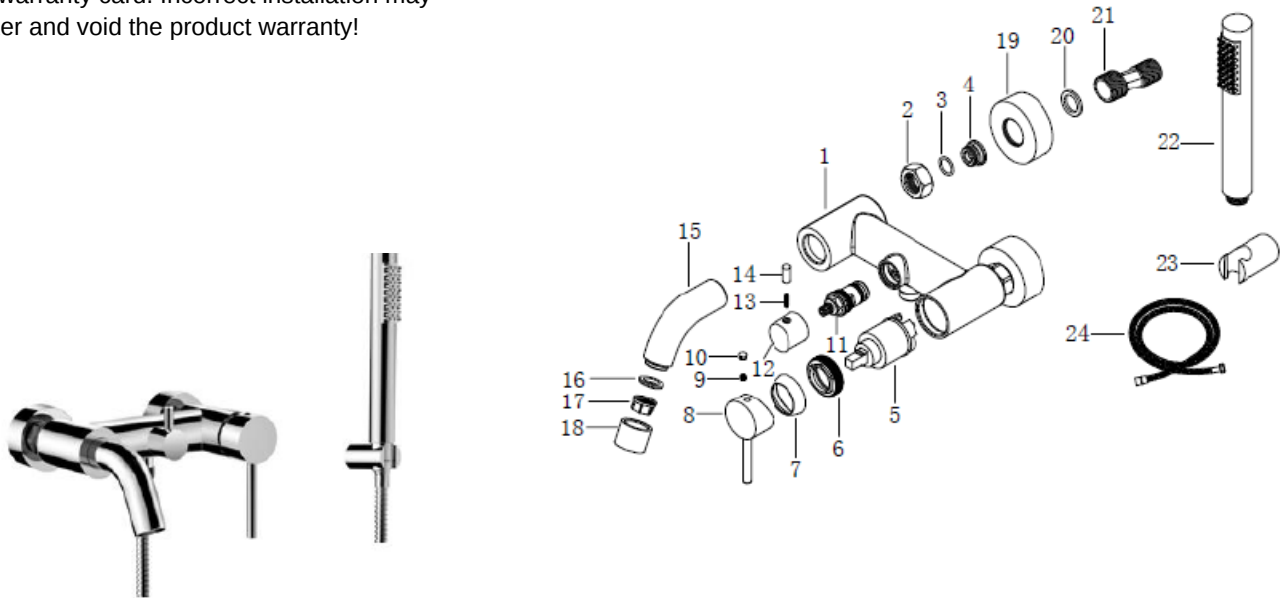

Dimensional drawing [mm / inches]:

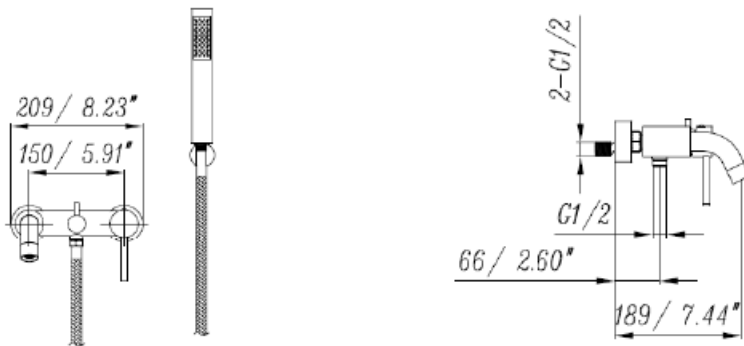


GENERAL INSTALLATION AND OPERATING INFORMATION:


1. Before installation, check that the product is complete and matches the order. If any parts are missing, defective or damaged (for example during transport), do not install the mixer.
2. Use the mixer only for its intended purpose. Besco mixers are intended exclusively for domestic use. Any other use is considered improper. Do not use the mixer in commercial applications.
3. Do not use the mixer in rooms where the air temperature falls below 4°C.
4. Before installation, thoroughly flush the water supply system to remove sediment, limescale particles, rust or other contaminants that could damage the mixer components.
5. During installation, ensure easy access to serviceable parts and components subject to normal wear, such as cartridges, diverters and connection hoses.
6. Regularly clean the mixer, especially components such as the aerator, with clean water or a mild cleaning agent, then dry it with a soft cloth to prevent limescale build-up. Do not use corrosive or abrasive products, or products containing particles that may damage the surface and are not intended for this type of product.
7. Use tools with smooth, non-marking jaws during installation to avoid damaging the mixer components.

MIXER INSTALLATION:


1. First prepare and flush the hot- and cold-water outlets in accordance with the spacing shown in the diagram below. Wrap PTFE tape around the eccentric connectors (G1/2) and screw them into the hot- and cold-water outlets.

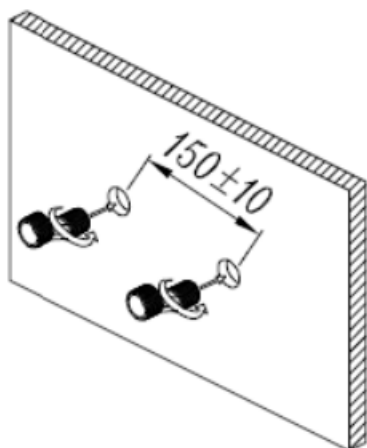


2. Place the mixer onto the eccentric connectors and adjust their spacing with a wrench so that the openings align and the mixer is exactly level. Remove the mixer, then install the washers and round cover plates on the adjusted connectors. Fit the mixer body onto the prepared outlets.

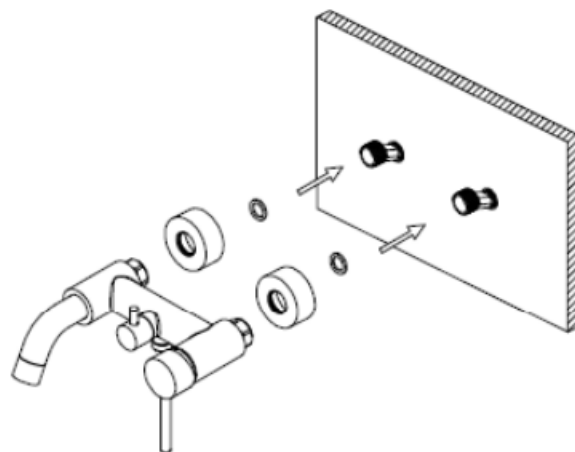

3. After installing the mixer, determine the best position for the hand-shower holder. Mark the appropriate point on the wall and drill the holes (Ø6 mm drill bit). Install the holder using the supplied mounting kit.

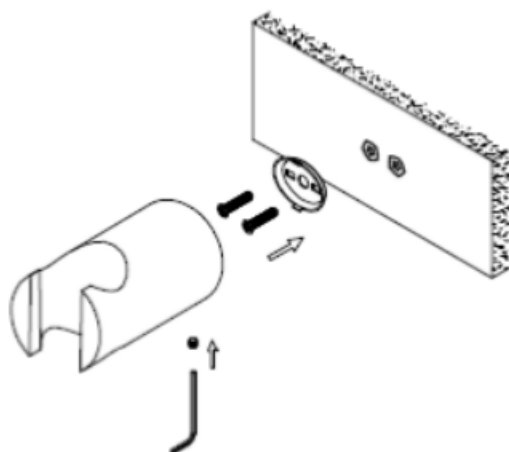

4. Finally, connect the shower hose to the mixer body and the hand shower.

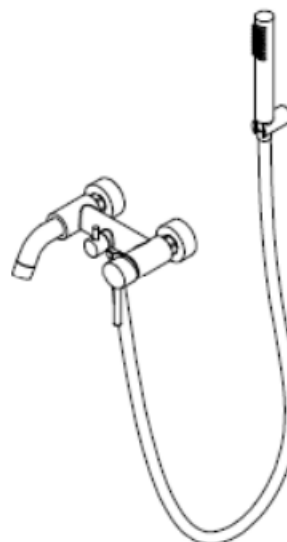

Installation of the bath mixer must be carried out only by a qualified professional. Installation by unauthorised persons may damage the product or other fittings, such as tiles or the bathtub.

